


Specification

| | |
|--|---|
| Analogue input | |
| Standards | Component 525 or 625 |
| Connectors | Three 75Ω BNCs |
| Signal level | 1V p-p ±10% |
| Return loss | >40dB to 5.5MHz |
| SDI outputs | |
| Standards | SMPTE 259M 270Mb/s 525/625 |
| Connector | 75Ω BNC |
| Number | 2 |
| Signal level | 800mVp-p ±10% |
| Return loss | >20dB to 270MHz |
| Performance | |
| Differential gain | <0.4% |
| Differential phase | <1.5° |
| Delay | <10ns |
| Quantisation | 10-bit |
| Power | |
| Voltage | 6-12V DC |
| Current | 400mA at 6V |
| Power connector | Locking 2.5mm jack connector (centre +ve) |
| Other | |
| LED | Shows power and signal |
| Temperature range | 0°C to 40°C |
| Dimensions | 63.5mm x 84mm x 30mm (excluding connectors) |
| Weight | 180g |
| <i>We reserve the right to change technical specifications without prior notice. E&OE.</i> | |

MediaBlox™



User Guide

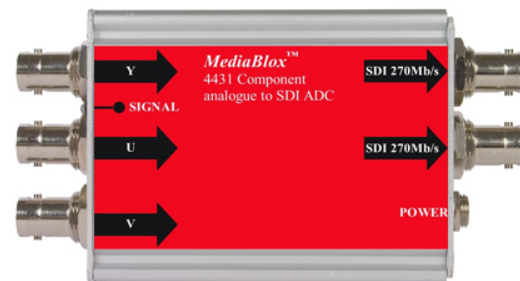

4431 Component analogue to SDI ADC

Component YUV input with two SDI outputs

www.kezvale.co.uk

General description

The 4431 is a broadcast quality component analogue to SDI converter.


It uses a 10 bit 2x over sampling ADC. The unit accepts, and automatically selects between, component analogue 525 and 625 line inputs at different levels.

It is housed in an extremely compact and rugged aluminium case ideally suited to both studio and portable applications.

Main features

- Component analogue to SDI ADC
- Two SDI 270Mb/s 525/625 outputs
- Dual high-speed over sampling 10-bit A/D converters
- Automatically selects between 525 and 625 lines
- VBI control
- Automatic gain control
- Compact and rugged design
- Locking connector for PSU

Functional block diagram

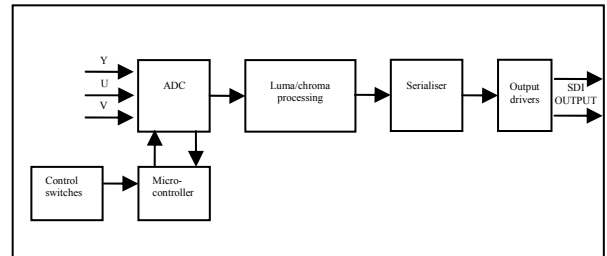

Installation and operation

The unit is simple to use and install.

- Set the dipswitches by referring to the table and description below or the table on the rear of the unit.
- Connect a valid analogue component input.
- Connect one or both of the 270Mb/s SDI outputs.
- Apply power to the unit either via the locking power connector from the external power supply or 1U rack frame, or by sliding into the 2U rack mounting frame with central power supplies.
- The LED will be green when there is power and a valid analogue signal present.
- The switch settings can be altered whilst the unit is powered and the changes are implemented immediately.
- The mounting bracket supplied can be used to install the unit. The bracket should first be fixed vertically to any surface. The MediaBlox can then be lowered onto the dovetail part of the bracket with the front endplate uppermost to retain it.

Switch settings

| Switch | OFF | ON |
|--------|----------|-----------|
| 1 | Pedestal | |
| 2 | Pass VBI | Blank VBI |
| 3-6 | Not used | |

The default switch setting on delivery is all switches in the off position.

- Switch 1 defines if there is a 7.5 IRE pedestal on the input analogue video source. When this switch is in the off position the unit does not expect a pedestal, when in the on position the unit expects a 7.5 IRE pedestal to be present on the input analogue video source.
- Switch 2 controls the vertical blanking information (VBI) on the SDI video output. When the switch is off all VBI data in the analogue video signal is passed through to the SDI output. When enabled the VBI data is removed from the analogue input and not passed to the SDI output.
- Switch 3-6 are unused on this unit.

EU declaration of conformity

We certify that this apparatus conforms to the requirements of the EMC and Low Voltage Directives. Emissions EN55103-1, susceptibility EN55103-2 and safety EN60950-1 2002.

15 July 2005



Warranty

Kezvale Ltd warrants this unit against defects in materials and workmanship for a period of one year from the date of shipment. At its option, the company will repair or replace products that prove to be defective during the warranty period, provided they are returned to the company with advance notification and with freight prepaid. Repairs may only be conducted by an authorised representative of the company. As a result any unauthorised repair or attempted repair will automatically void the warranty.

When a distributor supplies the company's products, that distributor should be approached initially if there are any warranty problems.

The company makes no other warranties, express or implied, as to the merchantability, fitness for a particular purpose, or otherwise. The company's liability for any cause, including breach of contract, breach of warranty, or negligence, with respect to products sold by it, is limited to repair or replacement by the company, at its sole discretion. This remedy is exclusive. In no event shall the company be liable for any incidental or consequential damages, including loss of profits.