

Specification

SDI input	
Standards	SMPTE 259M 270Mb/s 525/625 SDI
Connector	75Ω BNC
Signal level	800mV p-p ±10% (terminated)
Return loss	>15dB to 270MHz
Cable equalisation	> 350m automatic (Belden 8281)
SDI output	
Standards	SMPTE 259M 270Mb/s 525/625 SDI
Connector	75Ω BNC
Signal level	800mV p-p ±10% (terminated)
DC offset	±100mV
Return loss	>18dB to 270MHz
AES-EBU input	
Standard	Balanced AES-EBU AES3-2003
Number	2
Type	Transformer coupled
Connector	Removable screw terminal
Termination	Balanced 110Ω
Level	0.2-10V p-p
Sample rate	48kHz synchronous or 32 – 96kHz asynchronous
Audio embedding	
Standard	SMPTE 272M
Resolution	20 or 24 bit
Power	
Voltage	6-12V DC
Current	440mA at 6V
Power connector	Locking 2.5mm jack connector (centre +ve)
Other	
LEDs	Show power, signal presence & embedding status
Temperature range	0°C to 40°C
Dimensions	63.5mm x 84mm x 30mm (excluding connectors)
Weight	175g
<i>We reserve the right to change technical specifications without prior notice. E&OE.</i>	



User Guide



4461DB+ SDI balanced AES-EBU audio embedder with sample rate converter

Inserts two balanced AES-EBU digital audio streams into any group within a 270Mb/s 525/625 SDI signal

www.kezvale.co.uk

EU declaration of conformity

We certify that this apparatus conforms to the requirements of the EMC and Low Voltage Directives. Emissions EN55103-1, susceptibility EN55103-2 and safety EN60950-1 2002.

18 November 2005



Warranty

Kezvale Ltd warrants this unit against defects in materials and workmanship for a period of one year from the date of shipment. At its option, the company will repair or replace products that prove to be defective during the warranty period, provided they are returned to the company with advance notification and with freight prepaid. Repairs may only be conducted by an authorised representative of the company. As a result any unauthorised repair or attempted repair will automatically void the warranty.

When a distributor supplies the company's products, that distributor should be approached initially if there are any warranty problems.

The company makes no other warranties, express or implied, as to the merchantability, fitness for a particular purpose, or otherwise. The company's liability for any cause, including breach of contract, breach of warranty, or negligence, with respect to products sold by it, is limited to repair or replacement by the company, at its sole discretion. This remedy is exclusive. In no event shall the company be liable for any incidental or consequential damages, including loss of profits.


General description

The 4461DB+ SDI balanced AES-EBU audio embedder with sample rate converter inserts two balanced stereo AES-EBU streams into the ancillary data space of a 270Mb SDI signal. The input stream can be embedded as 20 or 24 bit audio. Internal audio sample rate converters allow the applied audio to be of any sample rate between 32 and 96kHz. The sample rate conversion may be bypassed to allow for non-PCM audio streams. Embedding conforms to SMPTE 272M and allows audio to be inserted into any of the four groups. Existing audio groups can be added to or completely removed. There is automatic cable equalisation and a re-clocked SDI output is provided.

Main features

- Inserts two asynchronous balanced AES-EBU stereo pairs into any group
- Supports all audio sample rates from 32kHz to 96kHz
- Inserts digital silence when audio signals are not present
- Replaces or adds to existing audio
- Automatic detection of 525/625 SDI
- Selectable 20 or 24 bit embedding
- LEDs show group status and input signal presence
- Automatic input cable equalisation to over 350m
- EDH generation
- Re-clocked SDI output
- Extremely compact and rugged

Functional block diagram

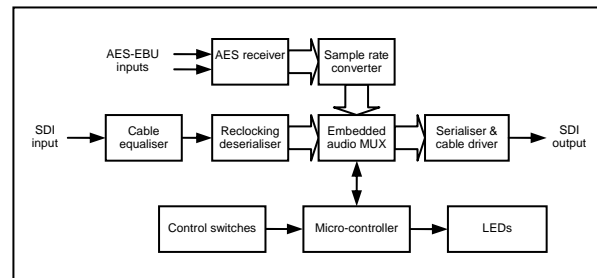

Installation and operation

The unit is simple to use and install.

- Set the dipswitches by referring to the table and description below or the table on the rear of the unit.
- Connect a valid 270Mb/s SDI signal.
- Connect a valid AES3 signal. (This may be synchronous or asynchronous, and of any sample rate up to 96kHz. Alternatively if the sample rate converters are bypassed this must be 48kHz synchronous.)
- Connect SDI output.
- Apply power to the unit either via the locking power connector from the external power supply or 1U rack frame, or by sliding into the 2U rack mounting frame with central power supplies.
- On power-up the unit will perform a short (3 second) self test. The group LEDs will flash while this is in progress.
- The signal LED will be green when there is power and a valid 270Mb/s SDI signal present or red when there is power but no SDI signal.
- One of the group LEDs will light corresponding to the group selected by the switches. This LED will be green if the unit is receiving a valid video signal and successfully embedding audio. The LED will otherwise be red.
- The switch settings can be altered whilst the unit is powered and the changes are implemented immediately.
- The mounting bracket supplied can be used to install the unit. The bracket should first be fixed vertically to any surface. The MediaBlox can then be lowered onto the dovetail part of the bracket with the front endplate uppermost to retain it.

Switch settings

Switch	OFF	ON	Switch	OFF	ON
1	Audio group		4	24 bit	20 bit
2	Update CS	Pass CS	5	Pass EDH	New EDH
3	Cascade	Overwrite	6	SRC on	SRC bypass

Switch 1 is used to set the group into which the audio samples are inserted. Toggling switch 1 will cycle through the 4 groups. The group setting is stored in EEPROM and is therefore retained even after the unit has been powered down.

Switch 2 selects whether the audio channel status is updated to reflect the resulting resolution and sample rate of the audio after sample rate conversion. Due to the nature of sample rate conversion, whole C-bit and U-bit data blocks may be dropped or repeated depending on the sample rate of the incoming audio. Switch 2 has no effect when the sample rate converters are bypassed.

Switch 3 determines whether existing audio packets are deleted from the video signal. When the switch is off, new audio packets are appended without deletion of existing packets allowing up to four units to be connected in cascade.

Switch 4 controls the resolution of the embedded audio. When the switch is off, extended audio packets are multiplexed into the video signal (24 bit audio). When the switch is on, extended audio packets are not included (20 bit audio).

Switch 5 selects between the unit passing through any EDH data unaltered or generating new EDH data.

Switch 6 is used to bypass the sample rate conversion.